


JOINT STANDS

Graphics Specifications

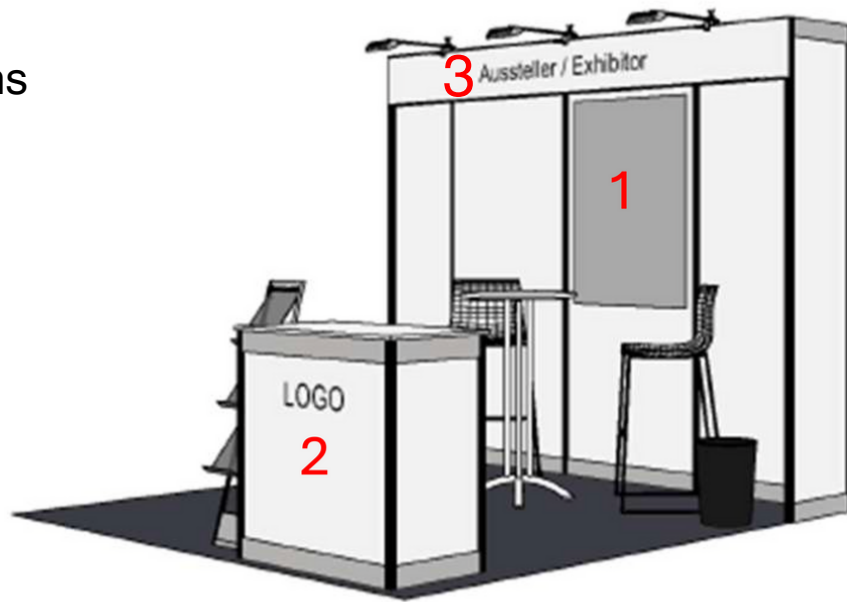

Graphics Specifications

- 1 A0 Poster**
Print size:
841mm x 1189mm
plus 2mm bleed.
- 2 Infocounter**
Print size:
974mm x 825mm
plus 2mm bleed.
Visible size:
960mm x 810mm
- 3 Your company name in printed letters**

Grafikspezifikationen

- 1 A0 Poster**
Druckmaß:
841mm x 1189mm
zzgl. 2mm Beschnittzugabe.
- 2 Infotresen**
Druckmaß:
974mm x 825mm
zzgl. 2mm Beschnittzugabe.
Sichtmaß:
960mm x 810mm
- 3 Ihr Firmenname in Druckbuchstaben**

PLEASE UPLOAD YOUR GRAPHICS HERE

<https://www.dropbox.com/request/2bj4J34k32DodHY6cJbR>

Additional Specifications

- **File format:** Please provide files as **.eps** or **.pdf**, vectorised.
- Ideally, artwork should be supplied at a **1:1 scale**. If this is not possible, the chosen scale must be stated (e.g. 1:10).
- **Colour mode: CMYK** — spot colours must be converted to 4c; please do not use spot colours.
- The stand builder works exclusively with the **Iso_coated_v2 colour profile**. You can download this colour profile free of charge from eci.org.
- **Fonts should always be converted to paths/outlines**. Otherwise, all fonts used must be supplied as TTF or OTF files.
- Images cannot be enlarged indefinitely without loss of quality, so they must be provided at a minimum resolution. As a rule of thumb: if an image is created at a 1:10 scale, it should have a resolution of at least 300–400 dpi. At a 1:1 scale, the resolution **should not fall below 30 dpi**.
- Vector graphics always have crisp, defined edges and can be scaled to any size without any loss of quality. For this reason, all logos should be supplied as vector graphics.
- We and the stand builder accept no responsibility for blurry or pixelated print results.

Zusätzliche Spezifikationen

- **Dateiformat:** Bitte senden **.eps** oder **.pdf**, vektorisiert
- Optimal ist eine Anlage im **Format 1:1**. Sollte dies nicht möglich sein, muss der gewählte Maßstab mit angegeben werden (z.B. 1:10)
- **Farbmodus CMYK**, Sonderfarben bitte unbedingt in 4c, keine Sonderfarben
- Der Messebauer arbeitet grundsätzlich mit dem **Profil Iso_coated_v2**. Das Farbprofil können Sie unter eci.org kostenlos herunterladen.
- **Schriften sollten immer in Pfade/Kurven** umgewandelt sein, andernfalls müssen alle verwendeten Schriften als TTF oder OTF mitgeliefert werden.
- Bilder können nicht beliebig ohne jeglichen Qualitätsverlust vergrößert werden, deswegen müssen sie in einer gewissen Mindestauflösung geliefert werden. Als „Faustregel“ gilt: Wenn ein Bild im Maßstab 1:10 angelegt ist, sollte es mindestens zwischen 300-400 dpi aufweisen. Bei einem Maßstab von 1:1 sollte eine Auflösung von **30dpi nicht unterschritten** werden
- Vektor-Grafiken haben immer eine klare Außenkante und können daher ohne jeglichen Qualitätsverlust bis ins Unendliche skaliert werden. Deswegen sollten Logos aller Art immer als Vektor-Grafik angeliefert werden
- für unscharfe oder grobpixelige Wiedergabe im Druck wird von uns/dem Messebauer keine Verantwortung übernommen.